


**LT PR 3W/G**

# 3W Pattern Projector, Green

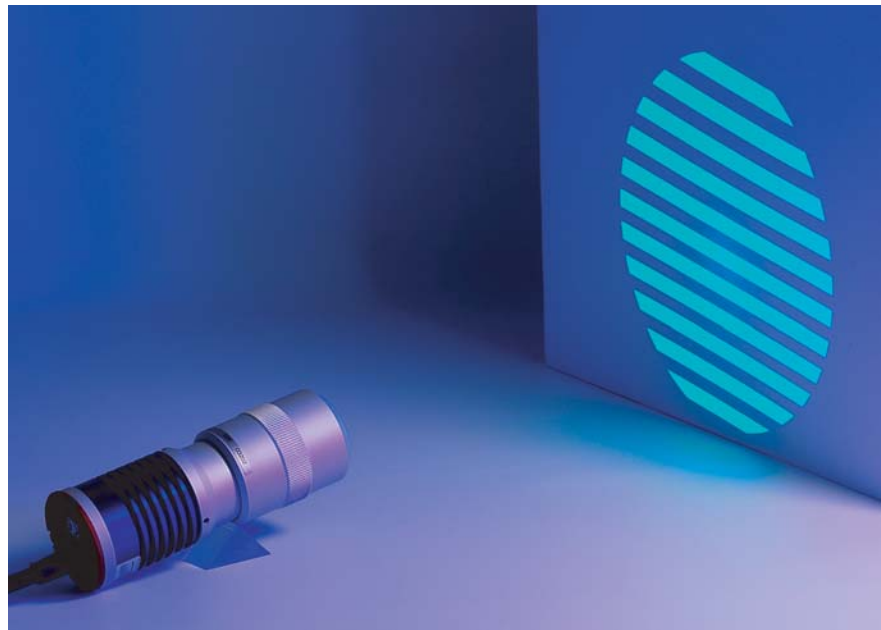

part number	LT PR 3W/G	
<b>Light Color, wavelength peak</b>		green, 520 nm
<b>DEVICE POWER RATINGS</b>		
Minimum DC Voltage	(volt)	12
Maximum DC Voltage	(volt)	24
Power Consumption	(watt)	< 3
<b>LED DIRECT DRIVE RATINGS</b>		
Forward DC Voltage	(volt)	3,8
Forward Current	(mA)	700
Pulse Ratings @0,1 duty/1kHz	(mA)	< 1800

Rev No.	Description	Date	Name
A	Nuovo pezzo	05/12/07	A.Vismara



Material	N.A.			Mass	163.8 g	Scale	2:1
Surface treatment	N.A.			Project-Prod.Item/Instrument		LTSPPR	
Geometrical tolerance (ISO 2768-2)			Class	K	Undimensioned bevels	1x45°	Description
Linear tolerance (ISO 2768-2)			Class	m			
0.5	>3-	>6-	>30+	>120	>400+	>1000	>2000
-3	6	30	120	+400	1000	+2000	+4000
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
www.opto-engineering.com			Date	Name	Drawing No.		
			Designed	17/03/03	A.Vismara	03532-0-A	
			Draw	05/12/07	A.Vismara	1/1	
			Checked	X	C. Sedazzari	Reproduction forbidden without specific authorization	
OPTO ENGINEERING S.r.l. - 46100 Mantova Italy - Via Cremona, 29/2 - Tel. +39 0376 229585 - e-mai: info@opto-engineering.it - http://www.opto-engineering.com							